
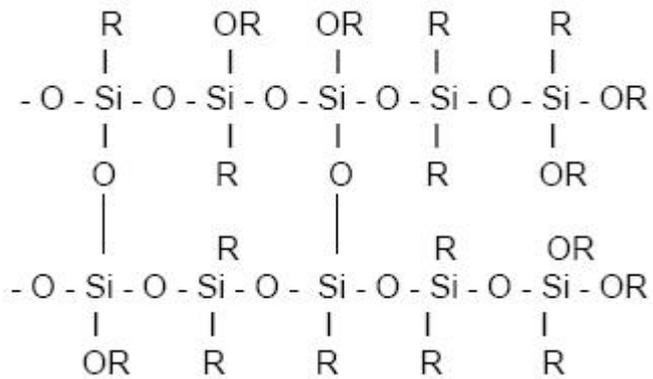
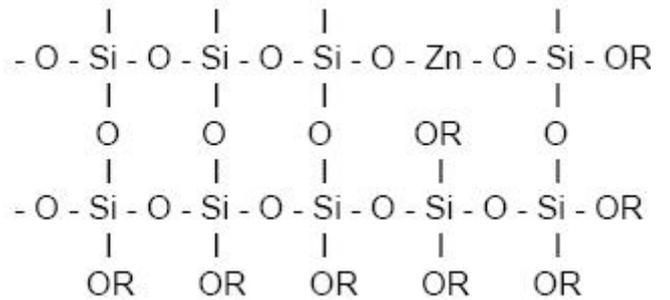


: J.M. Keijman
 : Ameron B.V.
 Protective Coatings Group

1. _____

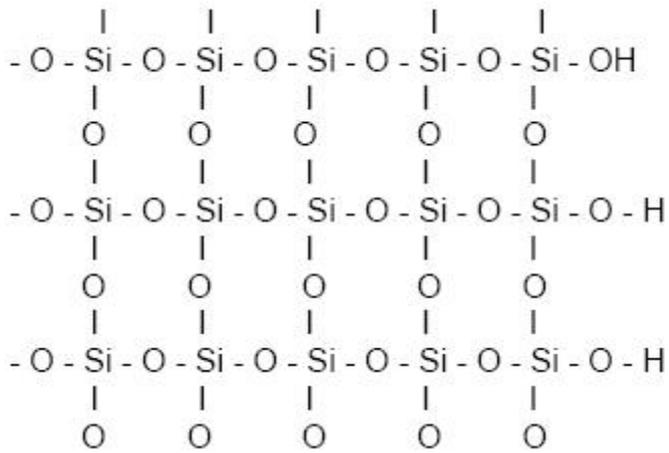

2. _____

?

2.1. _____ ()

(),

75

150

()

, 65-

9 16

75

10-

2.2. _____ :
(/)

90%

15 =75
6
2 29 / 75
2- 10-

3. _____

SA 2,5 65-75 150
/

3.1. _____

() 15 / ²
50
/ ²
ISO 15235 10.09.1998
3-7 / ²
50 / ²

3.2. _____

0-5°C 10°C
0°C,
24
/


4. _____ /

(ASTM-B 117)

/	-	300	
/	-	300	4
2 /	-	375	2,5

. 1

. 2

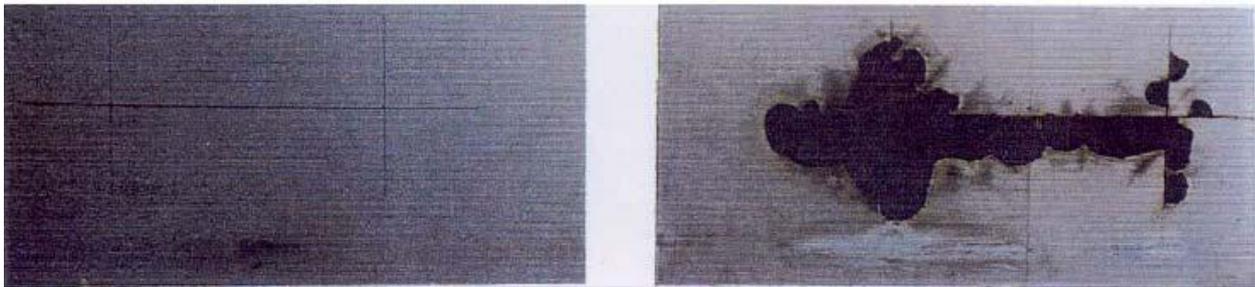

« » VLCC (160000) .

			%
	0	47 313	100%
	15	250	0,53%
	32	100	0,21%
	58	145	0,31%
	76	70	0,15%
	93	8	0,02%
:	93	573	1,22%

NACE () 96/477,

[Redacted text block]

6. [Redacted]

6.1. [Redacted] 1994
[Redacted] (),
[Redacted]

1970
[Redacted]
[Redacted]

- [Redacted]
- [Redacted]
- [Redacted]
- [Redacted]

6.2. [Redacted]
□ [Redacted]
□ [Redacted]
□ [Redacted]

7. [Redacted]

[Redacted]

8. [Redacted]
(: [Redacted])

200
/

90% - 120 / 75-

90%.

67%.

[Redacted text block containing multiple lines of obscured content]

-
-
-